INFRARED LASER DIODE

DL-7240-201S

SANYO

Ver.2 Oct. 2001

Features


- Wavelength : 785 nm (Typ.)
- Low threshold current : Ith = 30 mA (Typ.)
- High output power : 85mW (Pulse) at 60°C
- D-type shape stem

Applications


Optical disc system (CD-R)

Package

Tolerance : ± 0.2
(Unit : mm)

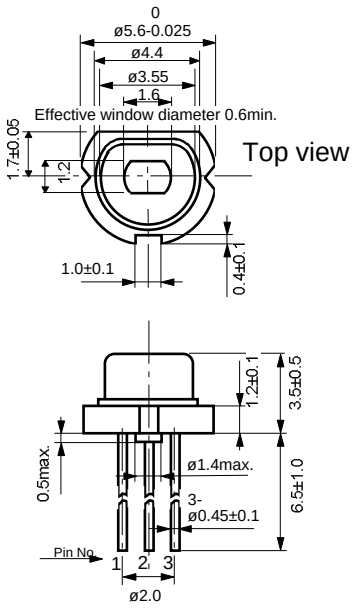

Pin Connection



Absolute Maximum Ratings

(Tc=25°C)

Parameter		Symbol	Ratings	Unit
Light Output	CW	Po (CW)	80	mW
	Pulse 1)	Po(pulse)	85	
Reverse Voltage	Laser	VR	2	V
Operating Temperature		Topr	-10 to +60	°C
Storage Temperature		Tstg	-40 to +85	°C

1) Pulse Width ≤0.5μs, Duty ≤50%

Electrical and Optical Characteristics

(Tc=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Threshold Current		Ith	CW	-	30	50	mA
Operating Current		Iop	Po=70mW	-	100	140	mA
Operating Voltage		Vop	Po=70mW	-	2.0	2.5	V
Lasing Wavelength		Lp	Po=70mW	780	785	800	nm
Beam Divergence 2)	Perpendicular	Qv	Po=70mW	15	17	20	°
	Parallel	Qh	Po=70mW	6	8	10	°
Off Axis Angle	Perpendicular	dQv	-	-	-	± 3	°
	Parallel	dQh	-	-	-	± 2	°
Differential Efficiency		dPo/dIop	-	0.6	1.0	1.4	mW/mA
Astigmatism		As	Po=70mW	-	-	10	μm


2) Full angle at half maximum

Note : The above product specification are subject to change without notice.


Tottori SANYO Electric Co., Ltd. Electronic Device Business Headquarters
LED Division
5-318, Tachikawa, Tottori 680-8634 Japan TEL : +81-857-21-2137 FAX : +81-857-21-2161

Characteristics


Output power vs. Forward current

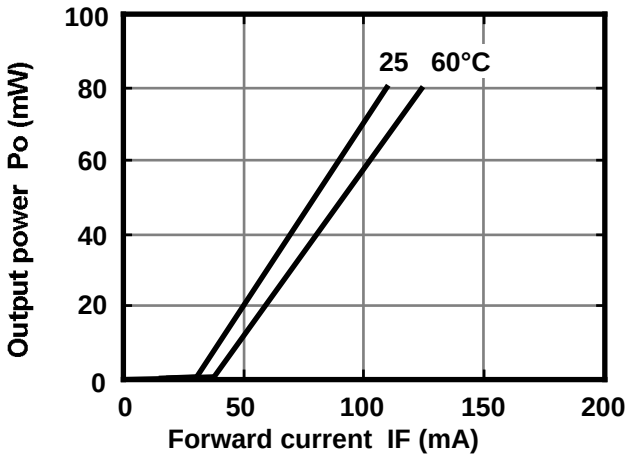


Threshold current vs. Temperature

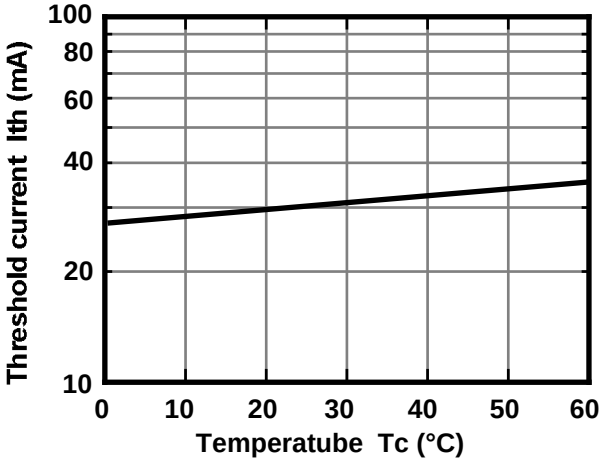


Lasing wavelength vs. Temperature

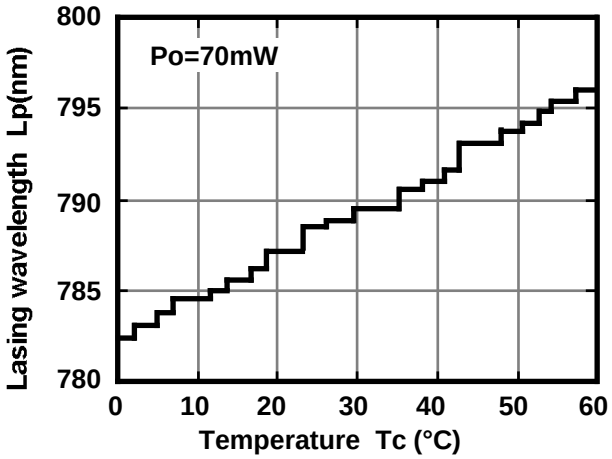

Output power vs. Lasing wavelength

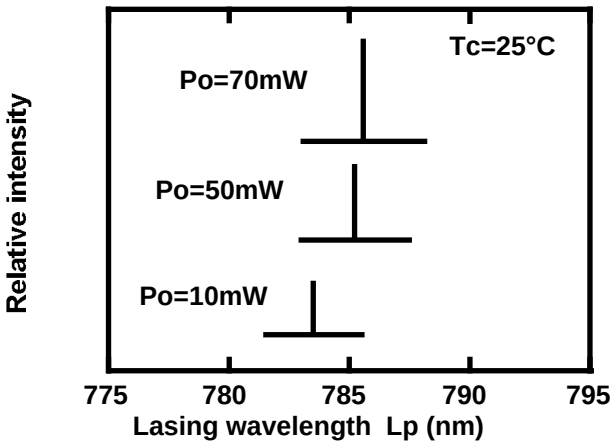

Beam divergence

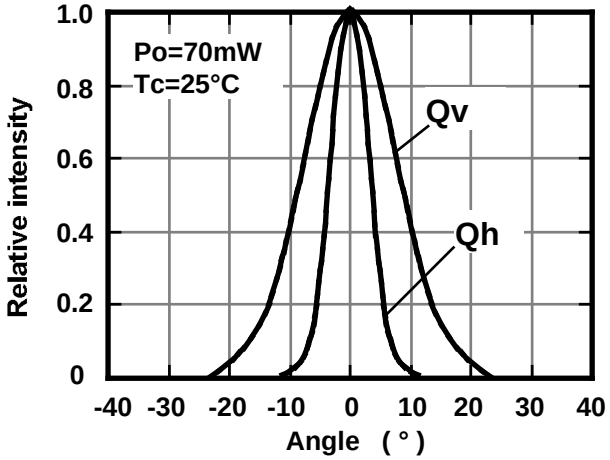

This is typical data and it may not represent all products.